

# PG - 3000



## *The Plating Line Control System*

### **Software :**

- **Documentation**
- **Data Base Functions**
- **Visual Process Control**
- **Parameter Setup**
- **Remote Control Services**

### **Hardware :**

- **Industrial PLC + PC**
- **Rugged Industrial Performance**
- **Modular Construction**
- **Field Bus - Systems**

### **Main Advantages:**

Laif engineering GmbH • Hansestraße 16 • D-48165 Münster  
Tel. +49 (0) 2501-9259-0 • Fax 9259-29 • e-mail: [info@laif-online.de](mailto:info@laif-online.de) • Internet: [www.laif-online.de](http://www.laif-online.de)

**1. Software :**

- Programming with or without Time-Way-Diagram
- Optimisation with or without priority
- Data Base System
- Operation and equipment data record
- Trouble message record
- Data security through password protection
- Test functions via PC
- PC-Software not copy protected
- Remote Control and maintenance services via standard modem

**2. Hardware :**


- Standard–PC without special components or cards
- Standard–PLC without special components or cards
- Flexibility through modular construction
- Field Bus performance ( CAN-Bus , Profibus und Ethernet )
- High availability through rugged industrial electronic components
- Different functionality for PLC and PC
- All control functions on PLC side
- Flexible interface concept for hardware connection
- Spare parts service guaranteed for min. 10 years

The Plating Line control system PG – 3000 is developed from the practice of the plating technology. The concept, experienced since years, has been developed continuously together with the development of the electronic industry



## PG – 3000, the Plating Line Control System

- General line view with flightbar location
- Flightbar view complete with article and process data (changeable during process)
- Hoist status view
- Flightbar data files view with recorded process protocol

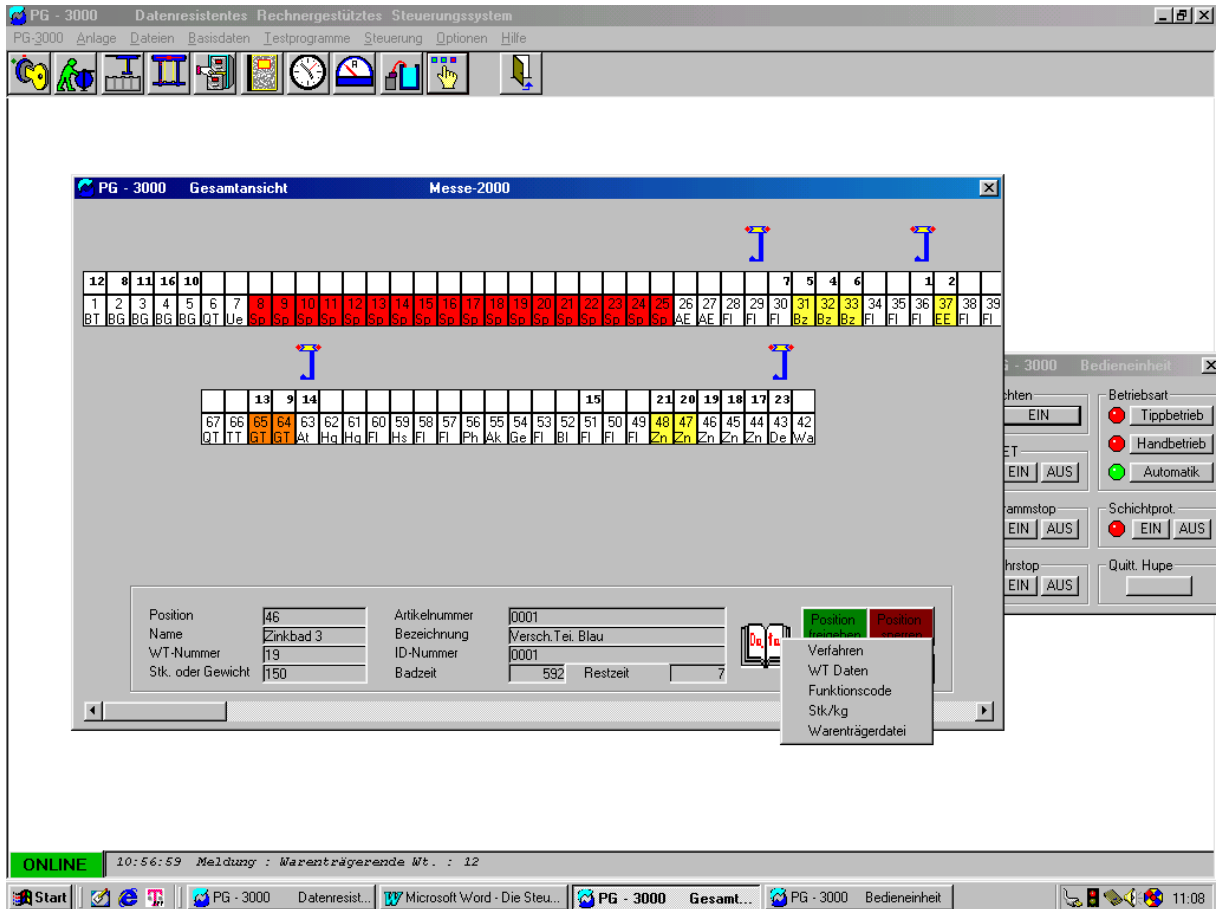


### 2) Line Parameter Setup:

- Position parameter setup (tank load/unload etc.)

## PG – 3000, the Plating Line Control System

- Spray rinse parameter setup (spray times etc)
- Rectifier parameter setup (max value, current density, hysteresis etc.)
- Dosing pump parameter setup (set points, dosing times, description)
- Malfunction setup (priority, message, description and visual view)

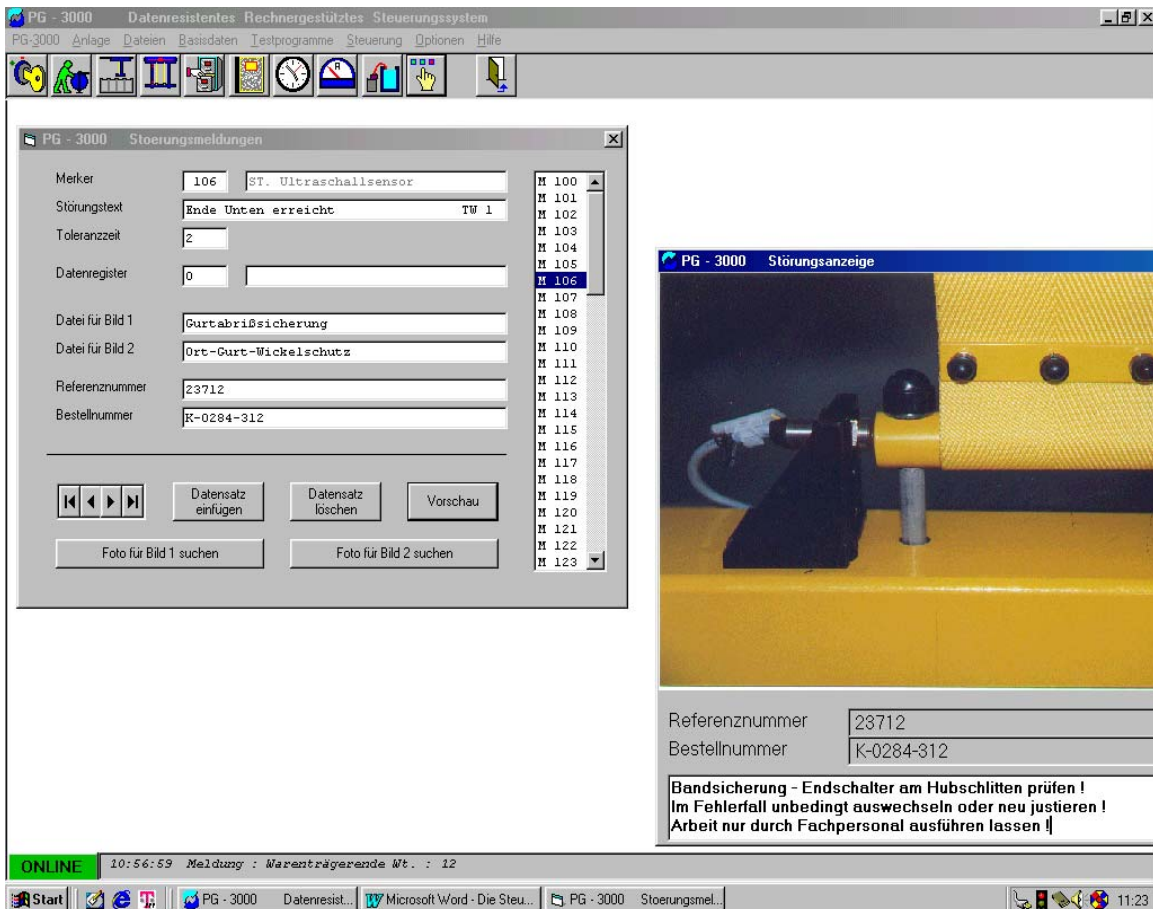


### 3) Flightbar Parameter Setup:



## PG – 3000, the Plating Line Control System

- Possible entries per article:
  - max. 4 lines with 32 digits each for customers address
  - max. 24 digits for the part (article) no.
  - max. 16 digits for the description
  - max. 8 digits for the identify no.
  - the process (treatment) steps,
  - No. of pieces or weight per flightbar,
  - more specific article informations i.e. temperatures for drying lines etc.
  - The article setup date will be recorded automatically
  
- A packing list no., if available, will be recorded together with packing list date in the charge protocol. A research with packing list no. is possible.
  
- Article (part) no. can be sorted, printed, copied or deleted with the help of a research screen mask

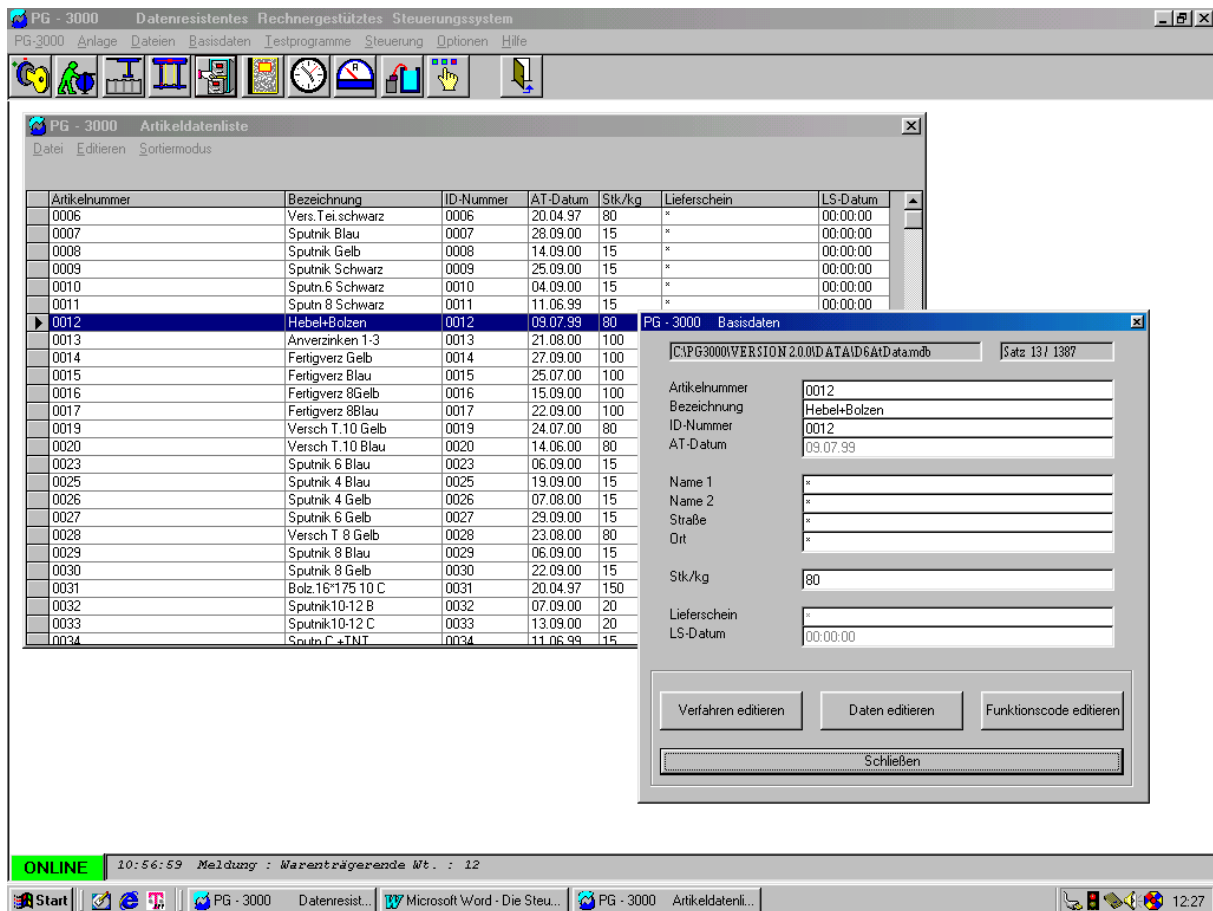

### 5) Screen Mask for Loading Station Data:

## PG – 3000, the Plating Line Control System

The screen mask for loading station data shows the article and identify no. as well as no. of pieces or weight for each loading station in the line. Furthermore, the following information can be inserted for each loading station:

- Up to 3 more packing list no. together with no. of pieces or weight and article no.
- Up to 4 text lines with additional information i.e. reason for re-work etc..

aktiver Beladestand

1 2 3 4 5

Freigabe mit Priorität  Freigabe ohne Priorität

erweiterte Beladestanddaten

Daten editieren

suche nach

Artikelnummer  
 ID-Nummer

0019

Daten übernehmen

Artikelnummer 0019  
Bezeichnung Versch T.10 Gelb  
ID-Nummer 0019

Name 1 \*  
Name 2 \*  
Straße \*  
Ort \*

Stk/kg 80  
Lieferschein Z 123-500

### 6) Protocol Files :

## PG – 3000, the Plating Line Control System

### Process Protocol :

The process protocol shows main information for each charge, i.e. start time, finish time etc. Entry view and printout is possible via a research screen mask.

A research via part-no., identify-no. date, packing-list-no. is possible.

The screenshot shows the 'PG - 3000 Betriebsdaten' window. It contains a list of data fields with their corresponding values:

Datensatz	81
Start-Uhrzeit	10:42:17
Start-Datum	26.04.01
Artikelnummer	0001
Bezeichnung	Versch. Teil. Blau
ID-Nummer	0001
AT-Datum	29.09.00
Lieferschein	*
Stk/kg	150
Chargennummer	11
Warenträger	12
WT - Info	---
Fertig-Uhrzeit	10:56:59
Fertig-Datum	26.04.01
Zeitüberschr.	

At the bottom, there are two buttons: 'Chargendatei anzeigen' and 'Artikelliste anzeigen'.

### Charge Protocol :

For each charge all important information i.e. actual treatment times, amp-hours in plating tanks, temperatures (option) will be recorded in a charge protocol. Modified data will be recorded also in the charge protocol.

The screenshot shows the 'PG - 3000 Chargendaten' window. It displays a detailed charge protocol with the following data:

-01- Beladestand Nr.	2
-02- Start-Uhrzeit	10:42:17
-03- Start-Datum	26.04.2001
-04- Artikelnummer	0001
-05- Bezeichnung	Versch. Teil. Blau
-06- ID-Nummer	0001
-07- AT-Datum	29.09.00
-08- Lieferschein	*
-09- Stk/kg	150
-10- Name 1	*
-11- Name 2	*
-12- Straße	*
-13- Ort	*
-14- Chargennummer	11
-15- Warenträger	12
-16- WT - Info	---
-17- Fertig-Uhrzeit	10:56:59
-18- Fertig-Datum	26.04.2001

Below the main data, there are three lines of additional information:

- \* 10:42:17 Data 0 = Funktionscode : 0
- \* 10:42:17 Data 1 = zus. Abtropfzeit : 0
- \* 10:42:17 Data 2 = Oberflaeche pro Stueck : 0.00

A 'Datei drucken' button is located at the bottom of the window.

## PG – 3000, the Plating Line Control System

### Shift Protocol :

If the shift protocol is switched on, information i.e. time, date, article-no., identify-no., no of pieces or weight will be recorded in the shift protocol for each flightbar. This guarantees a exact report about the productivity per shift.

lfd.Nr.	Datum	Uhrzeit	Artikelnummer	Identnr	Info	Charge
1	14.03.96	06:23:30	91029		30	1146
2	14.03.96	06:35:52	19359.2		45	1147
3	14.03.96	06:48:06	19359.2		45	1148
4	14.03.96	06:59:22	19359.2		45	1149
5	14.03.96	07:10:32	19350.2		45	1150
6	14.03.96	07:21:29	19350.2		45	1151
7	14.03.96	07:39:46	19350.2		45	1152
8	14.03.96	07:52:38	92825.32.2		40	1153
9	14.03.96	08:34:04	92825.32.2		40	1154
10	14.03.96	08:45:32	71026		24	1155
11	14.03.96	08:56:02	71026		24	1156
12	14.03.96	09:26:06	92825.32.2		40	1157
13	14.03.96	09:37:11	92825.32.2		36	1158
14	14.03.96	10:06:44	92825.30.2		33	1159
15	14.03.96	10:19:46	92825.30.2		33	1160
16	14.03.96	10:35:03	19950		35	1161
17	14.03.96	10:52:50	19950.2		34	1162
18	14.03.96	11:04:42	19950.2		34	1163
19	14.03.96	11:42:20	71026		23	1164

### Malfunction Protocol:

All malfunctions in the line will be recorded with start and finish time in the malfunction protocol. Malfunction messages will be selected and printed via a research screen mask.

Active malfunctions can be screened via mouse click. Malfunctions will be shown priority sorted together with malfunction-no. and message.

Additional to each malfunction message two pictures/graphics and a malfunction description text can be added. This saves time during the research for the malfunction reason.

0019 : Merker 121 = Gurtschlaffschalter hat ausgelöst TW 2  
 0020 : Merker 122 = Absettsicherung TW 2  
 0021 : Merker 123 = Absettsicherung defekt TW 2  
 0022 : Merker 124 = Absettsicherung schaltet nicht TW 2

**PG-3000 Störungsanzeige**

Gurtschlaff-Schalter

Gurtschlaffschalter an Transportwagen 2 überprüfen. Schalter ist defekt oder nicht richtig justiert. Reparatur nur durch Fachpersonal ausführen lassen!

### Dosing Pump Protocol :

Laif engineering GmbH  
 Tel. +49 (0) 2501-9259-0 • Fax 9259-29 • e

**PG - 3000 Dosierpumpendaten**

Datei Datensatz Suchen

Datensatz: 261  
 Dosierpumpennummer: 1  
 Dosierpumpenbez.: Kupfer  
 Dosierdatum: 11.08.94  
 Dosieruhrzeit: 15:08:39  
 Summenwert: 35537.11  
 Dosierwert: 100  
 Anzahl der Impulse: 37532  
 Dosierzeit: 40

## PG – 3000, the Plating Line Control System


Each dosing pulse will be recorded with date, time, sum-value and dosing time.

All entries will be selected and printed via a research screen mask.

### LOG-Book :

All data modifications will be recorded the LOG-Book.

All data can be selected and printed via a research screen mask.

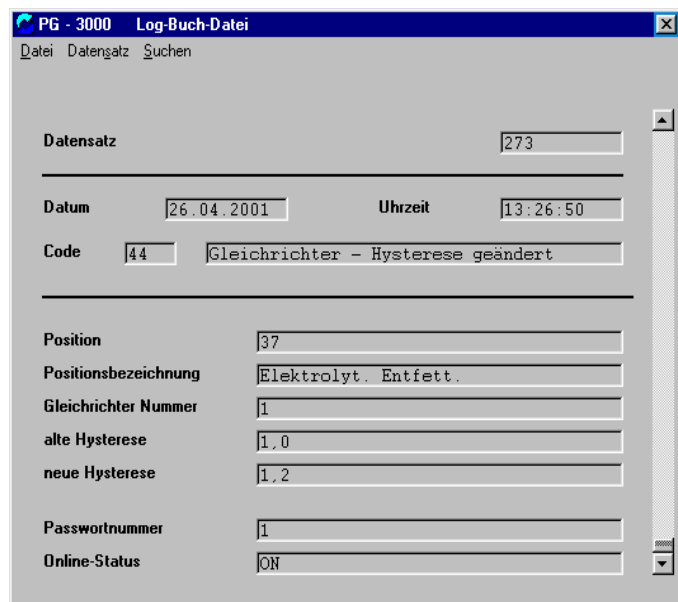


The screenshot shows a software window titled "PG - 3000 Log-Buch-Datei". The window contains a form with the following fields and values:

File	Datensatz	Suchen	
Datensatz	273		
Datum	26.04.2001	Uhrzeit	13:26:50
Code	44	Gleichrichter - Hysterese geändert	
Position	37		
Positionsbezeichnung	Elektrolyt. Entfett.		
Gleichrichter Nummer	1		
alte Hysterese	1,0		
neue Hysterese	1,2		
Passwortnummer	1		
Online-Status	ON		

### 7) Help - Function :

## PG – 3000, the Plating Line Control System

The software is equipped with an online help function which will be activated by switching the F1-key. The online help refers directly to the window from where it has been opened.

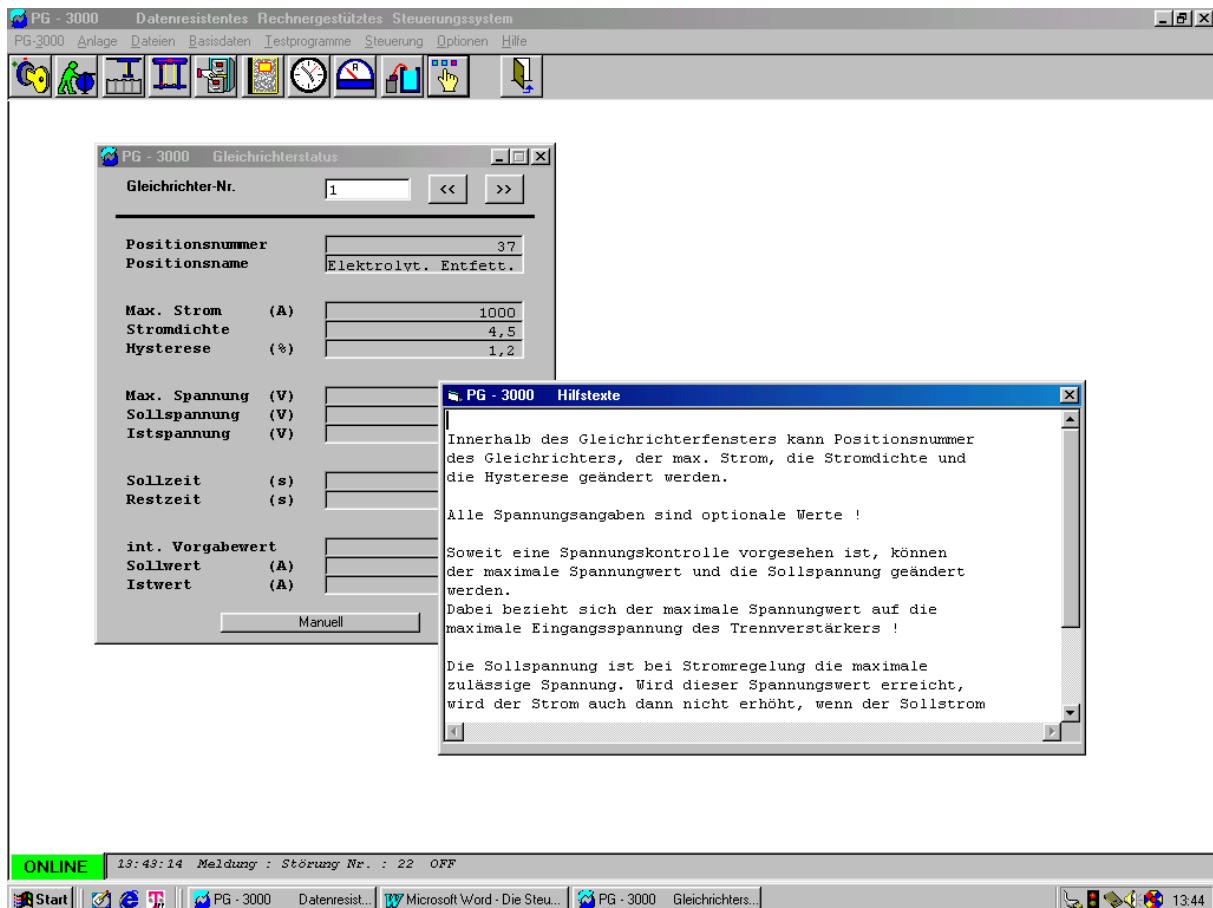

## PG – 3000, the Plating Line Control System

### 8) Specific Functions (Option) :

Control functions for additional aggregates i.e. rectifiers, heaters, level controllers etc. can be selected by a mouse click on the tank position. (Option)

The screenshot displays the PG-3000 control software interface. The main window, titled 'PG - 3000 Gesamtansicht Messe-2000', shows a grid of 39 tanks. Tank 37 is highlighted in yellow. A detailed control panel for 'Position 37 Elektrolyt. Entfett.' is overlaid on the right. This panel includes:

- Temperatur 3:** Two digital displays showing 30.0 and 30.0, with vertical bar graphs below them.
- Gleichrichter 1:** Two digital displays showing 4.5 and 45.1, with vertical bar graphs below them.
- Niveau 2:** A digital display showing 450 and a vertical bar graph.
- Controls:** Buttons for 'Erweite', 'Hilfe', 'Schließ', 'Manuell', 'HAND', and 'AUTO'.

At the bottom of the main window, a status bar shows 'ONLINE' and '15:05:49 Meldung : Wareträgerende Wt. : 17'. The Windows taskbar at the bottom shows the Start button and several open applications, including 'PG - 3000 Daten...', 'Microsoft Word - Die St...', 'PG - 3000 Gesamta...', and 'PG - 3000 Positions...'.

Setpoints and actual values are shown with bar graph diagram and sliding controllers.

The software itself is available in German and/or English version.